




Environmental Product Declaration

according to ISO 14025

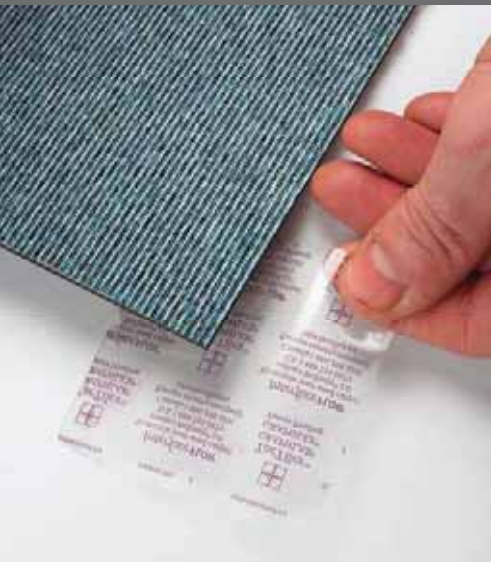

Interface **FLOR** Microtuft modular carpet

Elevation II

contains pre-consumer recycled material (backing)



LCA -calculation and support:
Gemeinschaft umweltfreundlicher Teppichboden e.V.

Declaration number
EPD-IFF-2010211-E

Institut Bauen und Umwelt e.V.
www.bau-umwelt.com



Institut Bauen
und Umwelt e.V.

		Short version Umwelt- Produktdeklaration Environmental Product Declaration
Institut Bauen und Umwelt e.V. www.bau-umwelt.com		Program operator
Gemeinschaft umweltfreundlicher Teppichboden (GUT) e.V. Schönebergstr. 2; 52068 Aachen; mail@gut-ev.de www.gut-ev.org		Program facilitator
InterfaceFLOR Europe Scherpenzeel, 3925 ZG. The Netherlands www.interfaceflor.eu		Declaration holder
EPD-IFF-2010211-E		Declaration number
Microtuft modular carpet having a surface pile made of 100 % solution-dyed polyamide 6 and a Graphlex® backing system with minimum 67% pre-consumer recycled content. This declaration is an Environmental Product Declaration according to /ISO 14025/ and describes the environmental performance of the floor coverings indicated herein. It is designed to foster the development of ecological and healthy building. In this validated declaration, all relevant environmental data are disclosed. The declaration is based on the PCR document "Floor coverings", year 2008-01.		Declared building product
This validated declaration authorises the use of the official stamp of the Institut Bauen und Umwelt (IBU). It is valid for a period of three years from the date of issue exclusively for the indicated product with the valid PRODIS licence "Elevation II" 13DDB10A. The contents and validity of the licence may be checked online via www.pro-dis.info . The owner of the declaration shall be liable for the underlying information and verifications.		Validity
The declaration is complete and furnishes details of: - the product definition and relevant building-physics-related information - the raw materials and origin of the raw materials - the descriptions of the product manufacture - the information on product processing - the information on the use stage, extraordinary influences and end-of-life stage - the results of the life cycle assessment - the description of the benefits beyond system boundaries		Content of the declaration
24 February 2010		Date of issue
		Signatures
Prof. Dr.-Ing. Horst J. Bossenmayer (President of Institut Bauen und Umwelt)		
This declaration and the rules on which it is based have been examined in accordance with /ISO 14025/ by the independent Committee of Experts (CoE).		Examination of the declaration
		Signatures
Prof. Dr.-Ing. Hans-Wolf Reinhardt (Chairman of the CoE)	Dr. Eva Schmincke (CoE-appointed Examiner)	



**Short version
Umwelt-
Produktdeklaration
Environmental
Product Declaration**

<p>The declaration covers a group of textile floor coverings having the following features:</p> <p>Kind of manufacture: Ultra low pile tufted using microtuft technology Surface pile material: 100 % solution-dyed polyamide 6 , Back coating: Graphplex® backing system with min 67% pre-consumer recycled content</p> <p>Subject to the weight of the surface pile, Microtuft modular carpet is classified in accordance to luxury and use classes as described in EN 1307::</p> <p>Luxury Classification LC1 Use classification 33 - Commercial areas with heavy traffic ...</p>	<p>Product description</p>
---	-----------------------------------

<p>As indicated on the PRODIS label, the textile floor covering may be used in the commercial area. Suitability for additional uses is also indicated on the PRODIS label (www.pro-dis.info).</p>	<p>Range of application</p>
---	------------------------------------

<p>The Life Cycle Assessment (LCA) was carried out according to /ISO 14040/ seq. following the requirements of the IBU guideline for type III declarations. The data reference consisted of specific data provided by GUT member companies and of data from the “GaBi 4” database. Specific product data for this declaration originate from InterfaceFLOR (the manufacturer) and its suppliers</p> <p>The life cycle assessment covers</p> <ul style="list-style-type: none"> - Part 1: Production stage including the supply chains (from cradle to factory gate) - Part 2: Delivery/installation, use - Part 3: End-of-life stage 	<p>Scope of the life cycle assessment</p>
--	--

Result of the life cycle assessment

Table 1: Results of the LCA for Microtuft modular carpet PA 6 from InterfaceFlor

Categories evaluated	Unit per m ²	Part 1 Production stage	Part 2		Part 3 End-of-life stage
			Delivery and installation	Use (1 year)	
Primary energy not renewable	[MJ]	163.5	2.5	3.8	-48.8
Primary energy renewable	[MJ]	7.2	6.7·10 ⁻⁴	0.3	-0.4
Greenhouse potential (GWP 100)	[kg CO ₂ -eqv.]	7.8	0.35	0.2	4.2
Ozone degradation potential (ODP)	[kg R11-eqv.]	6.2·10 ⁻⁷	-3.0·10 ⁻¹⁰	4.0·10 ⁻⁸	-2.6·10 ⁻⁸
Acidification potential (AP)	[kg SO ₂ -eqv.]	2.6·10 ⁻²	1.5·10 ⁻³	7.7·10 ⁻⁴	5.1·10 ⁻³
Nutrication (NP)	[kg PO ₄ -eqv.]	4.5·10 ⁻³	2.6·10 ⁻⁴	9.1·10 ⁻⁵	9.8·10 ⁻⁴
Photochemical oxidant formation (POCP)	[kg ethene-eqv.]	3.4·10 ⁻³	1.3·10 ⁻⁴	6.2·10 ⁻⁵	1.2·10 ⁻⁴

The results are based on the life cycle assessment for textile floor coverings conducted by **Gemeinschaft umweltfreundlicher Teppichboden (GUT) e.V.**, Aachen, in cooperation with: **Textile and Flooring Institut GmbH**, Aachen, critically reviewed by: **Prof. Dr. Walter Klöpffer**, Int. Journal of Life Cycle Assessment, LCA CONSULT & REVIEW, Frankfurt a.M., **Dipl. Natw. ETH Roland Hischier**, Head of unit LCA, EMPA, St Gallen

<p>In addition, the following tests are represented in the environmental declaration:</p> <p>VOC emissions GUT product testing criteria based AgBB scheme for the evaluation of emissions from building products,</p> <p>Tests for contaminants GUT product testing criteria</p>	<p>Verifications and tests</p>
--	---------------------------------------



Product group, PCR:	Textile Floor Covering, Floor coverings, 2008-01	Issued on
Declaration holder:	InterfaceFLOR Europe and Gemeinschaft umweltfreundlicher Teppichboden (GUT) e.V.	24-02-2010
Declaration number:	EPD-IFF-2010211-E	

0 Product definition

0.1 Product classification and description

Microtuft modular carpet having a surface pile made of 100% solution-dyed polyamide 6 and a Graphlex® backing system with minimum 67% pre-consumer recycled content.

The declaration covers a group of modular textile floor coverings having the following features:


Kind of manufacture: Ultra low pile, tufted using Microtuft technology

Surface pile material: 100 % solution-dyed polyamide 6

Back coating: Graphlex® backing system: Reinforced backing compound containing 67% (minimum) pre-consumer recycled material

Product: "Elevation II"

The Microtuft modular carpet product family represents a significant advance in carpet manufacturing by using an ultra-low surface pile. The carpet gives the appearance of a firm floor, yet is soft and has all the advantages of modular carpet. The product has a heavy contract performance classification equal to top quality conventional carpet tiles with higher surface piles.

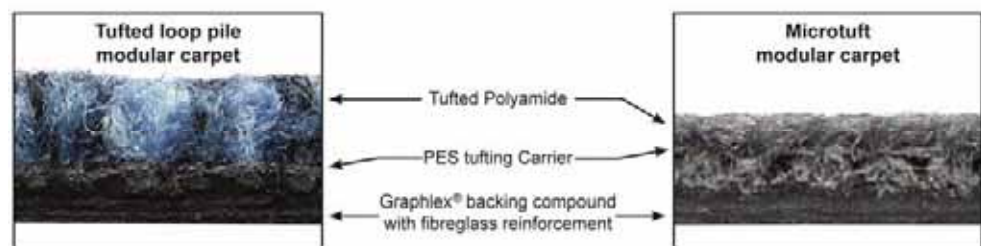

Graph 1: Construction of tufted loop pile and Microtuft modular carpet

The InterfaceFLOR's Microtuft tufting technology allows for ultra-low pile heights above and below the surface of a carpet tile. The amount of polyamide in this product is minimised to a total of 400 g/m². Reducing the polyamide content is a significant step to reducing the dependence on virgin raw materials. Microtuft modular carpets are an innovative way of dematerializing product without losing outstanding performance.

Furthermore, InterfaceFLOR's Microtuft modular carpet products incorporate pre-consumer recycled content in the backing. The Graphlex® backing contains 67% pre-consumer recycled material. The use of recycled materials avoids waste generation, reduces virgin resource depletion, as well as reduces the embodied energy and the emissions during the whole life cycle of the product.

The hard-wearing Microtuft modular carpets are ideally suited to offices as well as retail environments, leisure centres, restaurants and areas where hard flooring might otherwise be used.

Subject to the weight of the surface pile, Microtuft modular carpet is classified in accordance to luxury classes as:

EN 1307 Luxury Classification: **LC1**

FCSS symbol:





Environmental product declaration according to ISO 14025

Interface – Microtuft modular carpet – polyamide 6 surface pile with Graphlex® backing system page 5

Product group, PCR:	Textile Floor Covering, Floor coverings, 2008-01	Issued on
Declaration holder:	InterfaceFLOR Europe and Gemeinschaft umweltfreundlicher Teppichboden (GUT) e.V.	24-02-2010
Declaration number:	EPD-IFF-2010211-E	

0.2 Range of application

According to EN 1307 the product is classified in use class 33:

Commercial areas with heavy traffic



FCSS symbol:

0.3 Product standard/ Approval

The following standards apply to the present product group:

- DIN EN 1307 - Textile floor coverings – Classification of pile carpets
- DIN EN 685 - Resilient, textile and laminate floor coverings - classification
- DIN EN 14041 - Resilient, textile and laminate floor coverings - Essential characteristics
- DIN EN 13501-1 - Classification of building products and building types according to their reaction to fire

The product is approved according to the European technical approval (CE-marking) as well as in accordance with the respective national approval principles for building products.

CE-marking: "Elevation II" 336-CPD-8538/2

General technical approval of Deutsches Institut für Bautechnik, Admission number (abz): "Elevation II" Z-156.601-531

0.4 Accreditation

Microtuft modular carpet products have been awarded a GUT/PRODIS test label for environment-friendly products.

PRODIS licence number: "Elevation II" 13DDB10A

Within the framework of this product testing system, annual controls are made by independent test institutes.

Graphlex® backed carpet tiles were also tested under the CHPS 01350 Indoor Air Quality requirements by an independent laboratory in California, USA and the results show that they meet the requirements of CRI's Green Label Plus programme.

InterfaceFLOR Microtuft modular carpets have been assessed by BRE Global Ltd and were certified with an 'A' Rating for Office environments in the BRE Green Guide to Specification, representing good environmental performance.

This product group has been produced in factories certified under the ISO 9001 Quality Management System and ISO 14001 Environmental Management System.

0.5 Delivery status

On delivery, Microtuft modular carpet products with polyamide 6 feature the composition and characteristics described in Table 2.

Table 2: Composition and characteristics		
Type of manufacture	Microtuft – ultra-low tufting	
Characteristics	Nominal value	Unit
Pile fiber composition	100 % Solution-dyed PA 6	
Carrier	100% PES	
Backing	100% Graphlex® backing system with 67% (minimum) pre-consumer recycled material	
Effective pile weight	145	g/m ²
Total pile weight	360	g/m ²
Total carpet weight	4060	g/m²



Product group, PCR: Textile Floor Covering, Floor coverings, 2008-01 Issued on
 Declaration holder: InterfaceFLOR Europe and Gemeinschaft umweltfreundlicher Teppichboden (GUT) e.V. 24-02-2010
 Declaration number: EPD-IFF-2010211-E

1 Material content

- 1.1 Material content** Table 3 shows the shares of the raw materials contained in Microtuft modular carpet products on delivery.

Table 3: Composition and characteristics						
Construction Layer	Material	Mass [%]	Renewable Ressource	Recycled	Availability	Origin
Total Pile layer	Polyamide 6	8.9	no	no	limited	USA
Carrier	Polyester, nonwoven	3.0	no	no	limited	Europe
Precoat Bonding Layer	SBR	20.2	no	no	limited	Europe
	Limestone		no	no	limited	Europe
	ATH		no	no	limited	Europe
Structural Graphlex® Backing	Bitumen	65.6	no	no	limited	Europe
	SBR		no	no	limited	Europe
	Limestone, pre-consumer recycled		no	yes	abundant	Europe
	Glassfleece	0.8	no	no	limited	Europe
	Polypropylene, coverfleece	1.5	no	no	limited	Europe

- 1.2 Production of main materials**

Polyamide 6 (PA 6)

Polyamide 6 is a thermoplastic plastic material that is formed from caprolactam through ring-opening polymerisation.

Polyester (PES)

The term is used for a large family of polymers (plastic materials) containing the ester functional group in their main chain. Most commonly this refers to the much used polyethylene terephthalate (PET).

Styrene Butadiene Rubber (SBR-Latex)

SBR latex is made through emulsion polymerisation from the monomers styrene and butadiene.

Limestone (CaCO₃)

Limestone is a sedimentary rock that consists largely of calcium carbonate. The material is pulverized to be used as a filler.

Recycled limestone (CaCO₃)

"Recycled limestone" results from waste that occurs as a leftover during limestone production. After drying and pulverizing it is added as filler to the Graphlex® Backing.

Aluminum Trihydrate ATH (Al(OH)₃)

Aluminium trihydrate is made from bauxite through digestion with sodium hydroxide solution.

Bitumen

Bitumen is a visco-elastic material, consisting essentially of hydrocarbons and their derivatives. It is obtained by refinery processes from petroleum.



Product group, PCR:	Textile Floor Covering, Floor coverings, 2008-01	Issued on
Declaration holder:	InterfaceFLOR Europe and Gemeinschaft umweltfreundlicher Teppichboden (GUT) e.V.	24-02-2010
Declaration number:	EPD-IFF-2010211-E	

Glassfleece

Glassfleece is a nonwoven mat made of long, thin glass fibres. The glass fibres are manufactured by drawing melted glass into thin threads.

Polypropylene (PP)

PP is a thermoplastic plastic material that is formed by means of catalysts through polymerisation of the monomer propene.

2 Product manufacture

2.1 Production process The production of Microtuft modular carpet is divided into 3 main partial stages.

Tufting using Microtuft technology:

Pile threads are machine-sewn into the carrier material across the entire breadth of the product by means of a multitude of needles arranged next to each other. The resulting loops will appear on the later surface as ultra low level loops.

Precoat:


On the back of the microtufted raw product, the x-SBR latex precoat is applied in order to anchor the bottom loop (filaments and tufts) of the pile yarn in the PES carrier layer.

Graphlex® Backing finish:

The Graphlex backing is applied to the precoated halfproduct. This backing is produced by impregnating a glassfleece with a hot bitumen compound and covering it with a fleece made of PP.

Ultrasound cutting and packaging:

Finally, the tufted and backed carpet is cut into tiles using an ultrasound cutting machine. Carpet tiles are inspected for quality and packed into boxes for storage and transport to the installation site.

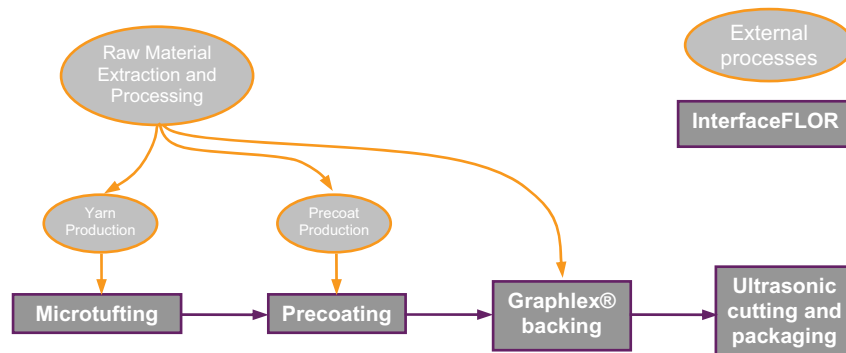

Graph 2: Diagram of the product steps

2.2 Health, safety and environmental aspects during production The applicable basic EU regulations and any stricter national-law provisions at the place of manufacture are complied with.



Product group, PCR:	Textile Floor Covering, Floor coverings, 2008-01	Issued on
Declaration holder:	InterfaceFLOR Europe and Gemeinschaft umweltfreundlicher Teppichboden (GUT) e.V.	24-02-2010
Declaration number:	EPD-IFF-2010211-E	

3 Delivery and installation

3.1 Delivery The carpets are transported from the production plant to the end user almost exclusively by lorry. For the purposes of the life cycle assessment, a 14-20 ton lorry with an average 85% utilisation of its payload and an average transport route of 700 km from the factory gate to the place of installation is assumed.

All our suppliers use modern vehicles that comply with emissions standards set out by the EU's Kyoto agreement. For further details on our transport initiatives please refer to section 7.13 "Description of the benefits beyond system boundaries"

3.2 Installation Installation of Microtuft modular carpet does not require adhesive application, but is done using TacTiles™, our glue-free installation system. TacTiles™ are PET connectors that go underneath carpet tiles' corners to fix them securely into place – creating a 'floating' floor layer between the carpet and the sub floor. So the carpet tiles are fastened tight, but not permanently stuck in place.

Using TacTiles™ installation system avoids the use of full spread tackifier, which prevents damage to the subfloor, increases ease of removal for maintenance and recycling, and makes installation during occupancy possible. This means greater flexibility and a much simpler and faster installation.

TacTiles™ installation system does not produce any odours or additional VOCs (compared to standard glues or fixing agents), and is therefore particularly interesting for installations to be carried in occupied buildings.



Graph 3: TacTiles™ installation system

3.3 Health, safety and environmental aspects during installation The VOCs associated with traditional flooring adhesives are avoided for both the installers and the building occupants by using the glue-free TacTiles™ installation method. TacTiles™ creates a floating floor, preventing damage to the subfloor and simplifying removal at end of life.

3.4 Waste Installation waste is minimized by several aspects of Microtuft modular carpet. The modular aspect of the carpet tiles and the design pattern allows for an installation waste between 2 and 3%.

According to Class 20 01 11 of the "European Waste Catalogue" (EWC) the textile floor covering and the trimmings to be disposed of may be classified as "municipal solid waste – textiles", a non-hazardous type of waste.

The Technical Guidelines on Municipal Solid Waste state that disposal on landfills has no longer been possible since 2005. These guidelines are not currently



Environmental product declaration according to ISO 14025

Interface – Microtuft modular carpet – polyamide 6 surface pile with Graphlex® backing system page 9

Product group, PCR:	Textile Floor Covering, Floor coverings, 2008-01	Issued on
Declaration holder:	InterfaceFLOR Europe and Gemeinschaft umweltfreundlicher Teppichboden (GUT) e.V.	24-02-2010
Declaration number:	EPD-IFF-2010211-E	

applicable throughout Europe and subject to an application moratorium. In certain countries installation waste can then be sent to landfill, or waste-to-energy incineration. Because of its non-hazardous nature, it can be safely handled through standard municipal waste handling procedures.

However, the preferred method for disposing of installation trimmings is through InterfaceFLOR's ReEntry take back programme. Through the ReEntry programme, InterfaceFLOR determines locally the environmentally best-way to dispose of carpet waste, depending on local availability of technology and capacity. The main disposal methods under consideration are re-use, recycling, re-purposing and waste to energy. Contact InterfaceFLOR ReEntry for details at reentry.europe@interfaceflor.eu.

- 3.5 Packaging** Carpet tiles are packaged in recycled cardboard boxes (100% post-consumer recycled content cardboard).

4 Use stage

- 4.1 Use** Subject to the marking on the PRODIS label, Microtuft modular carpet is intended for commercial areas. However, it may be used as well for residential purposes.

Microtuft modular carpets have a minimum service life of 10 years, but fashion-related and aesthetic aspects often make that carpet is replaced before. Technically, wear resistance may last much longer. If, in line with the recommendation, the textile floor covering is used in its use class, the service life may be considered independent of the use class.

- 4.1.1 Cleaning and maintenance** The classical cleaning appliance for the daily and regular care of the textile floor covering is the vacuum cleaner either with or without a brushing device.

In the life cycle assessment, the average cleaning frequency is assumed to be four times a week in commercial areas.

These values are mean values based on experience; the actual cleaning frequency is heavily dependent on the intensity of use and the degree of soiling.

Electrical energy is required to operate the vacuum cleaner.

For intensive cleaning, an additional wet cleaning process is employed. Here, dirt is rinsed out of the surface pile, as a rule by means of a spray extraction cleaner. A cleaning frequency 3 times in 2 years in commercial areas is recommended and taken into account in the life cycle assessment, the frequency depending on individual factors. The method requires the use of water and a cleaning agent and electrical energy is needed to operate the spray extraction cleaner.

- 4.1.2 Prevention of structural damage** In order to avoid excessive wear and changes in appearance during the use stage, it should be seen to it that the area of use does not require more than is permissible under the indicated use class of the individual product. Additional suitability indicated by an extra symbol according to /EN 685/ may enlarge the range of application.



Environmental product declaration according to ISO 14025

Interface – Microtuft modular carpet – polyamide 6 surface pile with Graphlex® backing system page 10

Product group, PCR:	Textile Floor Covering, Floor coverings, 2008-01	Issued on
Declaration holder:	InterfaceFLOR Europe and Gemeinschaft umweltfreundlicher Teppichboden (GUT) e.V.	24-02-2010
Declaration number:	EPD-IFF-2010211-E	

4.2 Health aspects during usage The emissions of the Microtuft modular carpet on delivery meet the requirements of the GUT test criteria for VOC emissions (Table 4) and contaminants (version 2004). For further information see www.gut-ev.org

Table 4: Limit values for volatile organic compounds		
Component	Limit value	Unit
TVOC	300	µg/m ³
VOC without NIK	100	µg/m ³
R value	≤ 1	-
SVOC (C16 to C22)	30	µg/m ³
Carcinogenic substances (EU list classes 1 and 2)	not identifiable	
Formaldehyde	10	µg/m ³
	0,008	ppm

5 Singular effects

- 5.1 Fire** The fire protection class is shown on the PRODIS label.
- 5.2 Water** In the unlikely event that major water quantities are present on the carpet over a prolonged period of time, then this may cause damage to the carpet.
- 5.3 Mechanical damage** Product is intended for commercial applications with heavy wear. Excessive wear of the textile floor covering during its service life need not be expected if it is employed and properly used, maintained and cleaned in compliance with its declared suitability (PRODIS). Product should be installed according to InterfaceFLOR installation guidelines.

6 End-of-life stage

According to Class 20 01 11 of the "European Waste Catalogue" (EWC) the textile floor covering to be disposed of may be classified as "municipal solid waste – textiles" (a non-hazardous waste category). Accordingly, disposal is carried out in compliance with local waste disposal systems.

6.1 Recycling or re-use InterfaceFLOR aims at providing customers with the most environmentally friendly end-of-life alternatives to carpet tiles. Since the environmental impacts of transportation to our recycling facilities can sometimes outweigh the environmental benefits of the recycling process, our ReEntry® programmes divert used carpet from landfills by assessing the options and proposing the most adapted and environmentally sound alternative for each region.

Local carpet-take back solutions include, by importance of volume: waste-to-energy solutions (e.g. cement kiln), carpet reutilization (extending its useful life) or repurposing (giving it a new life as something else, as for e.g. insulation, roofing) and carpet recycling (into new carpet backing through our CoolGreen™ carpet backing recycling technology available in our factory in Shelf, England).

Most ReEntry® programmes include collaborations with reinsertion-through-work NGOs. The financial benefits resulting of the sale of recovered carpet allow our partners to encourage employment initiatives among excluded population. In Europe, ReEntry® is currently available in France, Germany, Ireland, the Netherlands, Switzerland and the UK. Contact InterfaceFLOR ReEntry for details at reentry.europe@interfaceflor.eu.

6.2 Disposal According to the Technical Guidelines on Municipal Solid Waste, disposal on landfills has no longer been possible since 2005. These guidelines are not currently applicable throughout Europe and subject to an



Environmental product declaration according to ISO 14025

Interface – Microtuft modular carpet – polyamide 6 surface pile with Graphlex® backing system page 11

Product group, PCR:	Textile Floor Covering, Floor coverings, 2008-01	Issued on
Declaration holder:	InterfaceFLOR Europe and Gemeinschaft umweltfreundlicher Teppichboden (GUT) e.V.	24-02-2010
Declaration number:	EPD-IFF-2010211-E	

application moratorium. In certain countries installation waste can then be sent to landfill, or waste-to-energy incineration. Because of its non-hazardous nature, it can be safely handled through standard municipal waste handling procedures.

Environmentally preferred disposal for Microtuft modular carpet remains through our ReEntry® programmes (see 6.1 for details).

7 Life cycle assessment

- 7.1 General** The EPD is based on the life cycle assessment 'textile floor coverings' conducted by GUT.
- The respective results for the product manufacture, the delivery/installation, the use stage, and the end-of-life stage are shown separately.
- Electricity used during the manufacturing process at the InterfaceFLOR production site is 100% from renewable sources. These sources can be wind power, hydro power and biomass, the calculation considers a third share each.
 - Electricity used in external production sites is considered as an electricity mix EU-15 /GABI 4/.
 - For the stages delivery/installation standardised conditions are assumed (see chapter 3). Installation is assumed to be done using our TacTiles™ installation system without the need of any full spread liquid glue.
 - For the use stage, standardised conditions are assumed for cleaning and maintenance (see chapter 4).
 - For the end-of-life stage, the calculation considers use of our ReEntry® carpet take back programme for 100% of the installed modular carpet. All of the reclaimed carpet is assumed to be sent to Waste-to-Energy. The distance from the place of de-installation to the waste-to-energy incineration plant is assumed at 30 km.
- The basic data used meet the data quality requirements according to chapter 7.6.
- 7.2 Functional unit** The declaration refers to 1 m² of tufted textile floor covering.
- For the assessment of the use stage, the period of one year is taken into consideration. The values for deviating periods of use may be calculated by means of multiplication with the relevant factor.
- 7.3 Cut-off criterion** The limit of detail amounts to one per cent relative to the sum of the input streams and the energy input for the respective process. Substances used in smaller quantities but with a crucial function (e.g. the dye) are assessed as well. The sum of all neglected inputs in one process amounts to not more than 5% of the energy input and input streams.
- 7.4 Allocation** /ISO 14040/ defines the allocation as "partitioning the input or output flow of a unit process to the product system under study". In the present life cycle assessment, no relevant allocations (i.e. partitionings of environmental burdens of a process to several products) had to be made for the product manufacture, delivery, installation and use. Re-use entails an energy credit note due to the incineration of the textile waste.
- 7.5 Background data** The background data refer to
- /GaBi 4/, Database for the Preparation of life cycle assessments and /Ecoinvent/, Data Version 2.0.



Environmental product declaration according to ISO 14025

Interface – Microtuft modular carpet – polyamide 6 surface pile with Graphlex® backing system page 12

Product group, PCR:	Textile Floor Covering, Floor coverings, 2008-01	Issued on
Declaration holder:	InterfaceFLOR Europe and Gemeinschaft umweltfreundlicher Teppichboden (GUT) e.V.	24-02-2010
Declaration number:	EPD-IFF-2010211-E	

- 7.6 Data quality** For calculation purposes InterfaceFlor provided original data for product specifications and processes for the period 2008/2009. The GUT-LCA uses original data provided by the GUT member firms and generic data. For the inventories used, for the general processes and for all production steps, the data used in the inventory analysis were collected indicating their origin, the kind of data recording, the time-related, geographical and technological reference, and their quality was verified. As background data, European values from the /GaBi 4/ database were referred to. In as much as the framework of the assessment and the objective of the assessment are concerned, the data sets are complete and reflect representative values for the life-cycle-assessment stages production, delivery/installation, usage and disposal. The consistency and the traceability of the GUT-LCA data were verified within the framework of a critical review of the life-cycle-assessment study by Prof. Dr. Walter Klöpffer, Frankfurt a.M., and Dipl. Natw. Roland Hischer, St Gallen.
- 7.7 System boundaries** The life cycle assessment covers the entire life cycle of Microtuft modular carpet from cradle to grave. The **production stage** includes the extraction and manufacture of the raw materials used, their transport to the production facility, the entire production process, the thermal use of the production waste, the packaging, inclusive of the packing material of the final Microtuft modular carpet goods. The Graphlex® bitumen backing contain recycled material. */EN 14021/ defines recycled material as "Material that has been reprocessed from recovered material ..." and recovered material as "Material that would have otherwise been disposed of as waste or used for energy recovery, but has instead been collected and recovered as a material input, in lieu of new primary material, for a recycling or a manufacturing process.* Therefore the LCA impact calculation of recycled material considers only the impact of the recycling processes but not the provision of the raw material. The Graphlex® bitumen backing contains recycled limestone, resulting from waste that occurs as a leftover during the limestone production. The recycling processes are drying and pulverizing. The **delivery/installation stage** includes the transport of the packed carpet to the place of installation, its installation, inclusive of the provision of the TacTiles™ installation system, their production and transport to the place of installation, also the thermal use of the packing material. The **use stage** covers the cleaning and maintenance of the carpet during the period of one year including the cleaning agents, the extraction of the raw materials, their production and transport. The treatment of the waste water occurring during spray extraction is taken into consideration. For the **end-of-life stage**, the transport of the de-installed carpet to the ReEntry® programme partner (for Waste-to-Energy disposal) as well as the material and energy input of the waste incineration plant for the thermal use and all emissions are considered. In all life cycle stages, the respective disposal processes up to final deposition, with the exception of the deposition of nuclear waste, are modelled.
- 7.8 Note on use stage** The actual service life of a textile floor covering depends on various impact factors such as the allocation of the area of application to the use class, the maintenance and the intensity of usage. The comparability of textile floor coverings requires, among other things, uniform conditions of usage. For the life cycle assessment. the indicators for a defined usage scenarios were calculated as annual averages.



Environmental product declaration according to ISO 14025

Interface – Microtuft modular carpet – polyamide 6 surface pile with Graphlex® backing system page 13

Product group, PCR: Textile Floor Covering, Floor coverings, 2008-01
 Declaration holder: InterfaceFLOR Europe and Gemeinschaft umweltfreundlicher Teppichboden (GUT) e.V.
 Declaration number: EPD-IFF-2010211-E

Issued on 24-02-2010

7.9 Result of the life cycle assessment (LCA)

Table 5: Result of the LCA for Microtuft modular PA 6 carpet from InterfaceFlor

Categories evaluated	Unit per m ²	Production	Delivery/ Installation	Use during 1 Year	End of life
Primary energy not renewable	[MJ]	163.5	2.5	3.8	-48.8
Primary energy renewable	[MJ]	7.2	$6.7 \cdot 10^{-4}$	0.3	-0.4
Greenhouse potential (GWP 100)	[kg CO ₂ -Äqv.]	7.8	0.35	0.2	4.2
Ozone degradation potential (ODP)	[kg R11-Äqv.]	$6.2 \cdot 10^{-7}$	$-3.0 \cdot 10^{-10}$	$4.0 \cdot 10^{-8}$	$-2.6 \cdot 10^{-8}$
Acidification potential (AP)	[kg SO ₂ -Äqv.]	$2.6 \cdot 10^{-2}$	$1.5 \cdot 10^{-3}$	$7.7 \cdot 10^{-4}$	$5.1 \cdot 10^{-3}$
Nutrification (NP)	[kg PO ₄ -Äqv.]	$4.5 \cdot 10^{-3}$	$2.6 \cdot 10^{-4}$	$9.1 \cdot 10^{-5}$	$9.8 \cdot 10^{-4}$
Photochemical oxidant formation (POCP)	[kg Ethen-Äqv.]	$3.4 \cdot 10^{-3}$	$1.3 \cdot 10^{-4}$	$6.2 \cdot 10^{-5}$	$1.2 \cdot 10^{-4}$

The values for **the entire life cycle V_T** may be calculated as follows:

$$V_T = \text{Value}_{\text{Production}} + \text{Value}_{\text{Delivery/installation}} + n \cdot \text{Value}_{\text{Use 1 Year}} + \text{Value}_{\text{End of life}}$$

n representing the number of years of life considered in each case.


7.10 Life cycle inventory analysis (LCI)

The following chapters will describe in all detail the selected indicators of the life cycle analysis of 1 m² of Microtuft modular carpet for all life stages.

7.10.1 Primary energy requirement

The primary energy here under consideration results from the energy input for all processes that are bound in the raw materials as fossil resources (oil).

Graph 4 shows the relative contributions of the life cycle stages product manufacture, including the provision of the raw materials, delivery/installation, usage per year and end of life to the primary energy consumption (renewable and non-renewable).

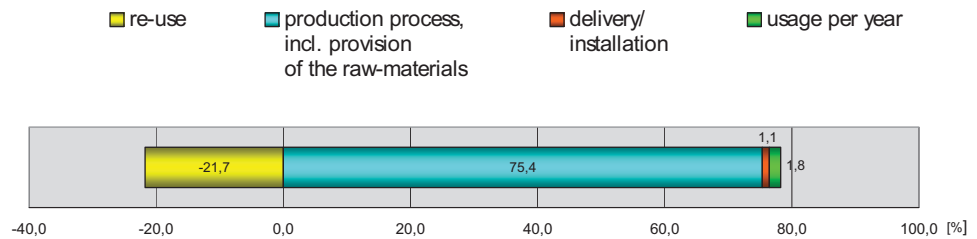

Graph 4: Relative contributions of the life cycle stages to the primary energy consumption (regenerative and non-regenerative)

Graph 5 differentiates the primary energy used from non-renewable and renewable raw materials for the production stage according to different partial processes of production. It shows that the predominant contribution to the primary energy consumption results from the provision of the raw materials for the production of the textile floor covering.



Environmental product declaration according to ISO 14025

Interface – Microtuft modular carpet – polyamide 6 surface pile with Graphlex® backing system page 14

Product group, PCR:

Textile Floor Covering, Floor coverings, 2008-01

Issued on


Declaration holder:

InterfaceFLOR Europe and Gemeinschaft umweltfreundlicher Teppichboden (GUT) e.V.

24-02-2010

Declaration number:

EPD-IFF-2010211-E

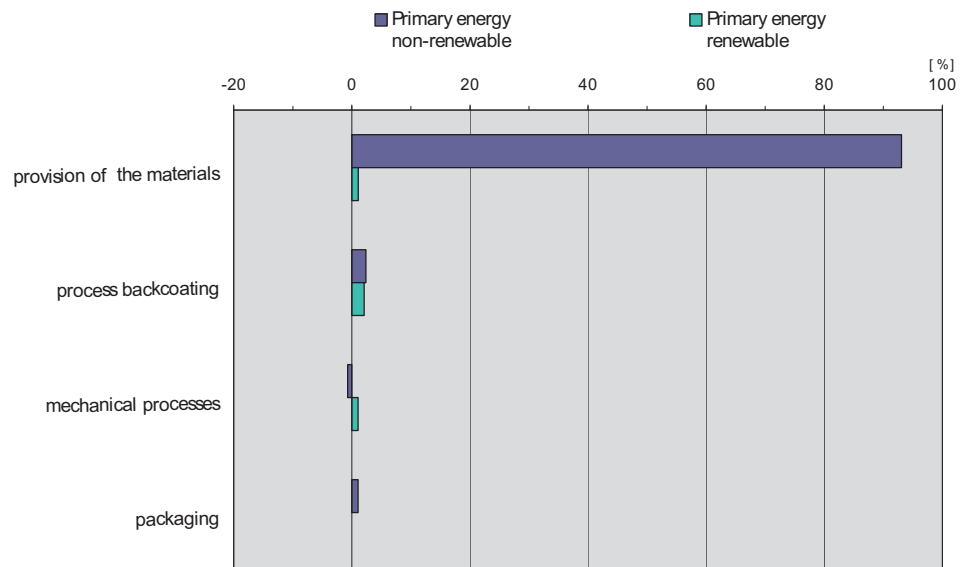

Graph 5: Relative contributions of different partial processes of production to the primary energy consumption

Provision of the materials refers to all materials that are delivered to the carpet production site. It includes the raw materials, the manufacturing of the product (as yarn, carrier, precoat etc) and the transport to the carpet production site.

Process backcoating refers to the precoat and the backing-system. It includes the energy input for application and drying, the waste water and the emissions. According to info given in 7.1 the amount of renewable primary energy used is nearly 50 %.

Mechanical processes include tufting, cut-off and the thermal use of the production waste. They give rise to energy credit notes resulting from production waste and edge-waste re-use in the waste incineration plant.

Packaging includes the provision of the packing materials and their transport to the production site.




Product group, PCR:
Declaration holder:
Declaration number:


Textile Floor Covering, Floor coverings, 2008-01
InterfaceFLOR Europe and Gemeinschaft umweltfreundlicher Teppichboden (GUT) e.V.
EPD-IFF-2010211-E

Issued on
24-02-2010

Graph 6 and 7 show the respective share of the energy sources in the non-regenerative and in the regenerative primary energy input during the whole life cycle of 10 years.

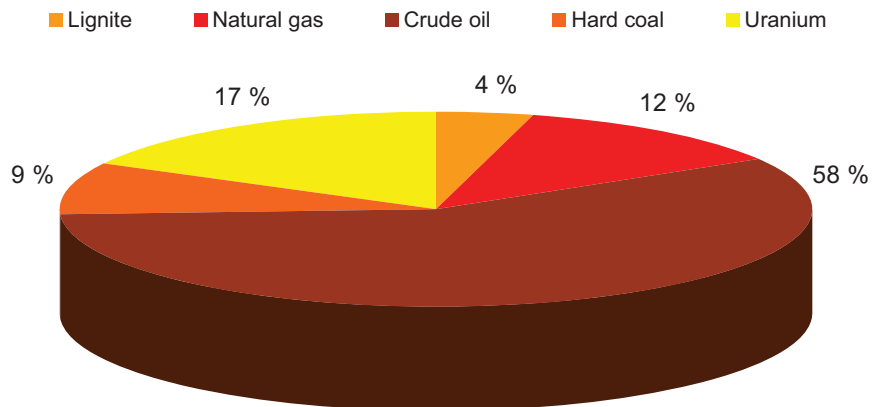

Graph 6: Shares of the non-renewable energy carriers

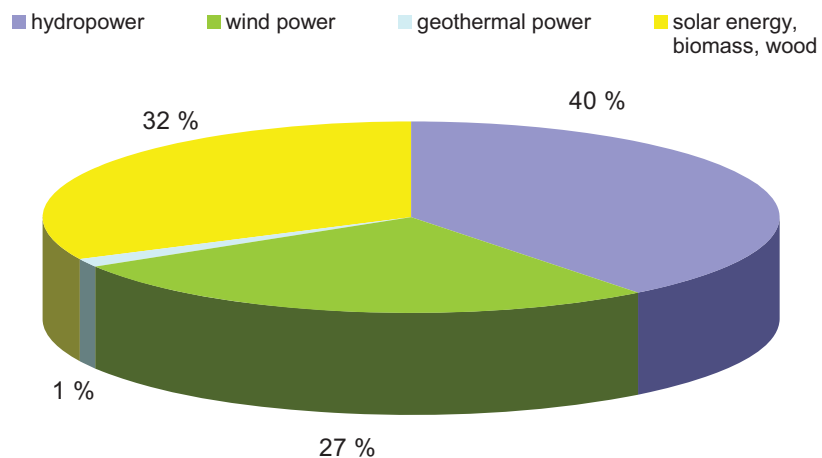

Graph 7: Shares of the renewable energy carriers

7.10.2 Non-renewable material content

The non-renewable raw materials are fossil or mineral raw materials that are used for energy generation on the one hand and on the other hand are contained as raw material in the product such as aluminium (0.06 kg/m²) for the manufacture of the flame retardant.

The raw materials lignite, natural gas, oil, mineral coal and uranium are primarily used for energy generation; oil is furthermore used as a raw material for the production of polymeric materials. A differentiation of the raw materials according to their use is not made; these materials are recorded in chapter 7.10.1.

Other mineral raw materials are limestone with 0.4 kg/m², sodium chloride (rock salt) with 0.04 kg/m², clay with 0.02 kg/m², colemanite ore with 0.02 kg/m² and iron with 0.01 kg/m², besides sulphur with 0.13 kg/m².



Environmental product declaration according to ISO 14025

Interface – Microtuft modular carpet – polyamide 6 surface pile with Graphlex® backing system page 16

Product group, PCR:
Declaration holder:
Declaration number:

Textile Floor Covering, Floor coverings, 2008-01
InterfaceFLOR Europe and Gemeinschaft umweltfreundlicher Teppichboden (GUT) e.V.
EPD-IFF-2010211-E

Issued on
24-02-2010

The non-utilisable ores and rocks, i.e. dead rock, account for 3.6 kg/m², the soil removal necessary for the production of the ores amounts to 0.03 kg/m², raw gravel also to 0.1 kg/m².

The values indicated refer to product manufacture. The use of recycled material results in a reduction of non-renewable material content.

7.10.3 Water consumption

Table 6: Water consumption [m³/m²]

Production	0.1
Delivery/installation	4.2·10 ⁻⁴
Usage	0.005
Disposal	0.01

Water for production is predominantly consumed during the manufacture of raw materials (96%).

7.10.4 Waste

Table 7: Waste occurrence [kg/m²]

non-hazardous waste		
	overburden/dump material	municipal solid waste
Production	3.62	0.02
Delivery/installation	-0.02	1.3·10 ⁻⁵
Usage	0.47	0.0
Disposal	-0.54	1.1·10 ⁻³
hazardous waste		
	special waste	radioactive waste
Production	0.014	0.003
Delivery/installation	2.0·10 ⁻³	-5.9·10 ⁻⁶
Usage	0.0	5.3·10 ⁻⁴
Disposal	1.4·10 ⁻³	-3.8·10 ⁻⁴

Dump material is mainly overburden resulting from ore production for the generation of electric power; municipal solid waste essentially is mineral waste.

Hazardous waste includes special waste containing chemicals and toxic waste, and also radioactive waste which consists primarily of residues from ore processing that occur during the provision of electric power.



Product group, PCR:	Textile Floor Covering, Floor coverings, 2008-01	Issued on
Declaration holder:	InterfaceFLOR Europe and Gemeinschaft umweltfreundlicher Teppichboden (GUT) e.V.	24-02-2010
Declaration number:	EPD-IFF-2010211-E	

7.11 Life cycle impact assessment (LCIA)

The environmental impacts resulting from the production of 1 m² of Microtuft modular carpet are expressed in impact categories based on the /CML 2002/ method.

The following categories are considered:

Global warming potential (GWP)

For the most frequent substances having an impact on the environment, the parameter GWP (global warming potential) is defined. The climate change was indicated for a time horizon of 100 years. The GWP describes the contribution of a substance to the greenhouse effect relative to the contribution of a like quantity of carbon dioxide (CO₂).

Ozone-layer depletion (ODP)

The depletion of the stratospheric ozone layer is caused primarily by chlorofluorocarbons (CFCs) and some chlorohydrocarbons and bromohydrocarbons. The reference substance used for the ozone depletion is the substance CFC R11, to which the ozone depletion potential (ODP) = 1 is allocated.

Acidification of soils and waters (AP)

The acidification potential indicates to which extent a component has an acidic effect. The acids are soluble in water and may rain down as acid rain. The various emissions within this category are related to sulphur dioxide (SO₂)-equivalents.

Nutrification (NP)

Nutrification is defined as the effect of excessive input of nutrients into the soil or water. Here, substances are considered that contain either nitrogen or phosphorus. The nutrification potential NP indicates the potential contribution of a substance to the production of biomass. The result is indicated in phosphate equivalents (PO₄).

Photochemical oxidant formation (POCP)

Summer smog is caused by the formation of photochemical oxidants in the lower troposphere. Summer smog is primarily caused through the reaction of hydrocarbons and nitrogen oxides (NOx) under solar radiation. The result is indicated in kilograms ethene equivalents, which is generated in the troposphere.



Environmental product declaration according to ISO 14025


Interface – Microtuft modular carpet – polyamide 6 surface pile with Graphlex® backing system page 18

Product group, PCR:
Declaration holder:
Declaration number:

Textile Floor Covering, Floor coverings, 2008-01
InterfaceFLOR Europe and Gemeinschaft umweltfreundlicher Teppichboden (GUT) e.V.
EPD-IFF-2010211-E


Issued on
24-02-2010

Graph 8 shows the relative contributions of the life cycle stages product manufacture, including the provision of the raw materials, delivery/installation, usage per year and end of life to the impact categories described hereinbefore for environmental impacts.

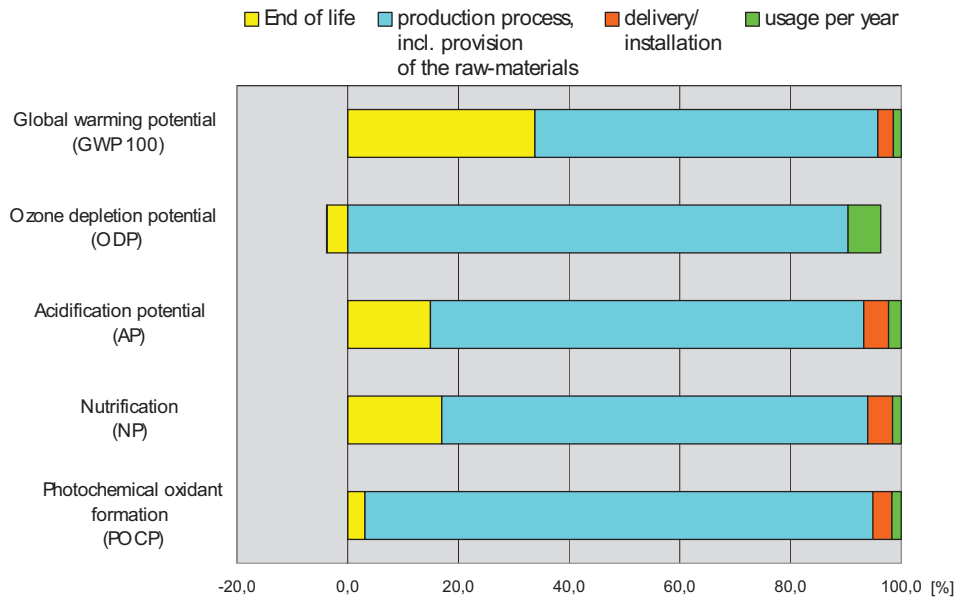

Graph 8: Relative contributions of the life cycle stages to the environmental impacts

Graph 9 differentiates the share of the environmental impacts for the product manufacture from Graph 8 according to different partial processes of production (analog to the processes graph 5). For all impact categories, the major part of the contributions results from the provision of the raw materials.

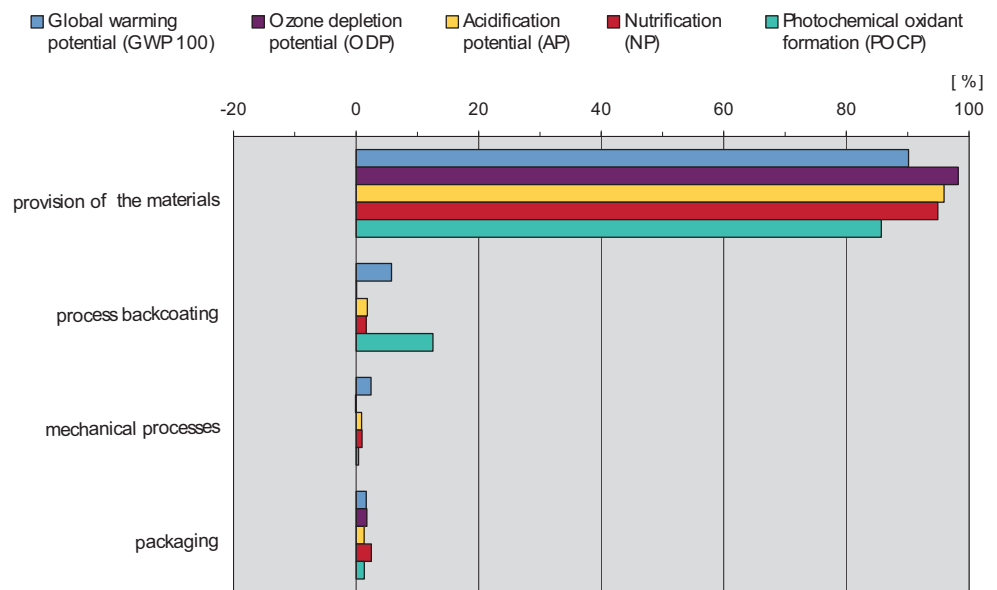

Graph 9: Relative contributions of different partial processes of production to the environmental impacts



Product group, PCR:	Textile Floor Covering, Floor coverings, 2008-01	Issued on
Declaration holder:	InterfaceFLOR Europe and Gemeinschaft umweltfreundlicher Teppichboden (GUT) e.V.	24-02-2010
Declaration number:	EPD-IFF-2010211-E	

7.12 Interpretation Graph 4 and 8 show that the **production process** (including the provision of the raw materials) accounts for the biggest share in the primary energy consumption and environmental impacts. Closer consideration (Graph 5 and 9) shows that, within this life cycle stage, by far the biggest share is caused by the provision of raw materials and not by the textile-related process steps.

The high amount of recycled limestone (67 %) only results in a minor impact reduction.

The **energy recovery** of the textile floor covering results in a primary energy credit of 21.7 % (graph 4). The ozone depletion potential (graph 8) also constitutes an energy credit at the end of life because it is crucially dependent on the thermal and electrical energy input. The credit for this energy outweighs the input.

In the overall assessment, the life cycle stages **delivery and installation** are of subordinate importance.

In this assessment, a **use stage** of one year is considered. For this period, the impact on the overall assessment is low. It is, however, pointed out that there is a linear rise in this share as the actual service life increases. In case of an assessment considering the entire period of service life, the values for use during 1 year must be multiplied by the years of life considered.

Comparisons with other floor coverings are permissible only if comparable background data and calculation methods are used and if the floor coverings' area of application is the same.

7.13 Description of Recycled materials

the benefits beyond system boundaries

InterfaceFLOR aims at designing products that actively close the loop today, thus reducing the need for non-renewable virgin raw materials. InterfaceFLOR products such as Microtuft modular carpet include Pre-Consumer recycled contents in its raw materials. Our Graphlex® backing system is composed of a minimum of 67% certified Pre-Consumer Recycled content. InterfaceFLOR is working pro-actively to increase the use in its products of polyamide fibres that contain recycled content.

Supply chain management

InterfaceFLOR works with suppliers to ensure they prioritise sustainability and work hard to reduce their own environmental impacts. Supplier evaluation questionnaires are sent to new and strategic existing suppliers to help assess their sustainability engagement, the sustainable features of their products as well as their adhesion to the Supply Chain Policy. We are currently working on several key areas to improve the environmental footprint of the raw materials we use, in particular Nylon yarn, precoat, backing components, namely by developing recycling programmes for used carpet.

Manufacturing improvements

Improving the efficiency of manufacturing operations is at the heart of InterfaceFLOR's Mission Zero sustainability strategy. The improvements achieved on certain performance indicators have been tracked since 1996 in what we call Ecometrics™. The latest Ecometrics™ (compounded globally or per manufacturing site) can be checked at <http://interfaceglobal.com/Newsroom/Ecometrics.aspx>

Some other manufacturing improvements include:

- Use of an ultrasonic cutting machine for cutting the carpet tiles. Use of this machine reduces manufacturing waste carpet trimmings by 80%, compared to the traditional die-cutting technology.
- Waste carpet trimmings from manufacturing is recycled and fed into new backing using our Cool Green machine in the UK and sent to Waste to Energy processes like cement kilns in the Netherlands.



Environmental product declaration according to ISO 14025

Interface – Microtuft modular carpet – polyamide 6 surface pile with Graphlex® backing system page 20

Product group, PCR:	Textile Floor Covering, Floor coverings, 2008-01	Issued on
Declaration holder:	InterfaceFLOR Europe and Gemeinschaft umweltfreundlicher Teppichboden (GUT) e.V.	24-02-2010
Declaration number:	EPD-IFF-2010211-E	

Packaging

InterfaceFLOR works on minimizing the packaging used to protect and transport finished products. For example, by substituting a double corrugated cardboard box for a single corrugated box, savings of more than 50 tonnes of cardboard a year can be realized at the factory in the Netherlands alone.

Transport

InterfaceFLOR uses outside contractors to deliver finished products. All transport suppliers use modern vehicles that comply with emissions standards set out by the EU's Kyoto agreement. Five of our 14 main international transport providers are certified to environmental standard ISO 14001. A further four have either plans to achieve ISO 14001 or other environmental management systems.

Some transport initiatives include working with suppliers to reduce the environmental impacts by using 'multi-modal' transport (where the most energy-efficient type of transport is used for each part of the journey). For example, by switching from truck to barge or train, InterfaceFLOR has cut transport related emissions from the Netherlands to Italy by 70% and from Scherpenzeel to Rotterdam in the Netherlands by 80%. Also by switching from dedicated to grouped delivery in the Netherlands, delivery trucks are now 85-90% full on average, reducing the total number of journeys required.

Maintenance, cleaning, extending product life

Good maintenance is key to extending the life of carpet tiles. InterfaceFLOR offers advice to periodically clean and maintain our carpet tiles, using the right cleaning products and the right procedures. In some countries, InterfaceFLOR also provides maintenance services. For example, in the Netherlands we offer a service of maintenance for the first two years of life, including periodical maintenance and guaranteed removal of stains.

Product take-back

InterfaceFLOR Europe's ReEntry® Programme is a used-carpet recovery service for any carpet that is being replaced by a new InterfaceFLOR product. ReEntry® guarantees that the carpet will be diverted from landfill and that the most environmentally sound disposal option for each region will be used (see chapter 6.1 above).

Carbon offsetting

All InterfaceFLOR's Microtuft modular carpet products are made climate neutral for their entire life cycle as described in the present EPD through the purchase of carbon offsets at no extra cost to the customer. This means that any greenhouse gases (GHGs) which are emitted during the life cycle of the product are offset, or balanced, after being calculated for a use life of 10 years. Carbon dioxide emissions are offset through investment in projects managed by our offsetting partners. These projects either reduce or reverse the impact of carbon emissions and are generally:

- Projects which produce renewable energy without adding CO₂ to the atmosphere;
- Projects which increase energy efficiency by cutting down on the amount of fossil fuels used and consequently the CO₂ produced;
- Projects which actually remove CO₂ from the atmosphere.
- For further information on our CoolCarpet® programme, please visit <http://www.jpmorganclimatecare.com/interface>



Environmental product declaration according to ISO 14025

Interface – Microtuft modular carpet – polyamide 6 surface pile with Graphlex® backing system page 21

Product group, PCR:	Textile Floor Covering, Floor coverings, 2008-01	Issued on
Declaration holder:	InterfaceFLOR Europe and Gemeinschaft umweltfreundlicher Teppichboden (GUT) e.V.	24-02-2010
Declaration number:	EPD-IFF-2010211-E	

8 Additional Information, verifications and test results

- 8.1 Emissions** The emissions of the textile floor covering on delivery meet the requirements of the GUT test criteria for VOC emissions (Table 4) and contaminants.
For further informations see: www.gut-ev.de and www.pro-dis.info

9 PCR document and examination

This declaration is based on the PCR document "Floor Coverings", 2008-01.

Review of the PCR document by the committee of experts. Chairman of the CoE: Prof. Dr.-Ing. Hans-Wolf Reinhardt (University of Stuttgart, IWB)
Independent verification of the declaration according to ISO 14025: <input type="checkbox"/> internal <input checked="" type="checkbox"/> external
Validation of the declaration: Dr. Eva Schmincke

10 Literature

/AgBB pattern/	Evaluation pattern of the AgBB (Committee for the Health-related Evaluation of Building Products) for VOC; procedure for the health-related evaluation of the emissions of volatile organic compounds (VOC and SVOC) from building products, BAM-Az 2006-3726, version of 2006.
/CML 2002/	Method "Centrum voor Milieukunde", Leiden, NL.
/EC1/	Association for Emission-controlled Installation Materials (GEV) - identification EMICODE EC1: very low emissions
/Ecoinvent/	Datenbase, Swiss Centre for Life Cycle Inventories, Data Version 1.3.
/EN 685/	DIN EN 685:2007-11, Resilient, textile and laminate floor coverings – classification; German version EN 685:2007
/EN 1307/	DIN EN 1307:2008-08, Textile floor coverings – classification of pile carpets; German version EN 1307:2008
/EN 14021/	DIN EN ISO 14021:2001-12, Environmental labels and declarations. Self-declared environmental claims (Type II environmental labelling); (ISO 14021:1999); German version EN ISO 14021:2001
/EN 14041/	DIN EN 14041:2008-05, Resilient, textile and laminate floor coverings – essential characteristics ; German version EN 14041:2004+AC:2005+AC:2006
/EN 14041/	Resilient, textile and laminate floor coverings – essential characteristics ; German version EN 14041:2004+AC:2005+AC:2006
/GaBi 4/	Software and database for the preparation of life cycle assessments, Faculty of Building Physics (LBP) of the University of Stuttgart and PE International, Stuttgart, Leinfelden-Echterdingen
/ISO 14040/	DIN EN ISO 14040:2009-11. Environmental management – Life cycle assessment – Principles and frameworks (ISO 14040:2006); German and English version EN ISO 14040:2006
/ISO 14025/	DIN EN ISO 14025:2007-10, Environmental labels and declarations – Type III environmental declarations – Principles and procedures (ISO 14025:2006); Text in German and English.



Institut Bauen
und Umwelt e.V.

Publisher:

Institut Bauen und Umwelt e.V.

Rheinufer 108

53639 Königswinter

Tel.: 02223 296679-0

Fax: 02223 296679-1

E-Mail: info@bau-umwelt.com

Internet: www.bau-umwelt.com

Layout:

Gemeinschaft umweltfreundlicher Teppichboden (GUT) e.V.,

InterfaceFLOR Europe

Picture credits:

InterfaceFLOR Europe

Scherpenzeel, 3925 ZG, The Netherlands

www.interfaceflor.eu